




Product Features


- Super Slim liner LED with RGB color changing output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr
- RGB color changing
- Degree of protection IP20

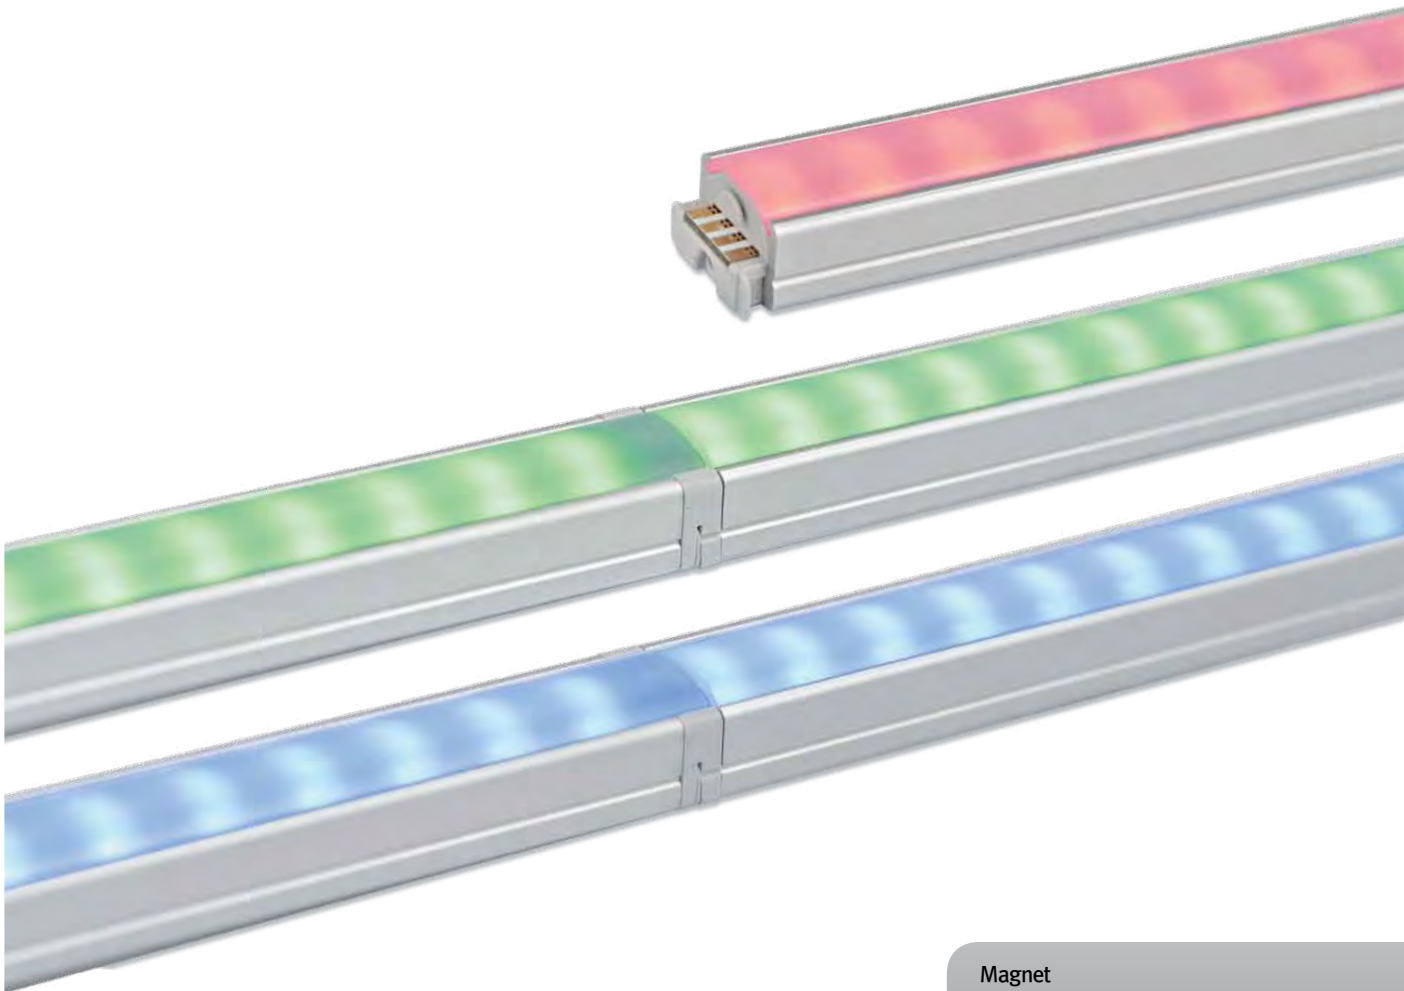

Magnet

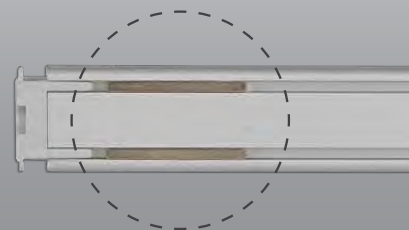

DIVA 2 RGB
Color changing



DIVA2 RGB 6W Length (285 mm)




DIVA2 RGB 12W Length (565 mm)



DIVA2 RGB 18W Length (845 mm)

Dimension

* Fixture

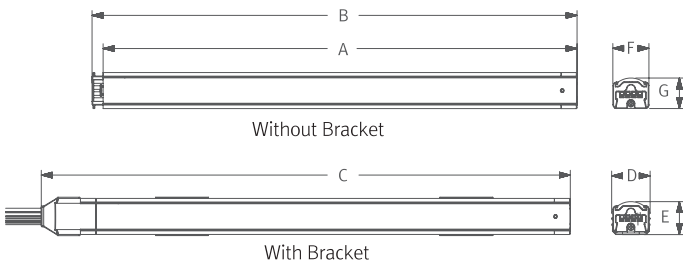

Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
DIVA300RGB	DC 24	6.2	280	285	302	16	14	15	12.5
DIVA600RGB	DC 24	12.4	560	565	582	16	14	15	12.5
DIVA900RGB	DC 24	18.6	840	845	862	16	14	15	12.5


Color changing



Easy connection



Installation

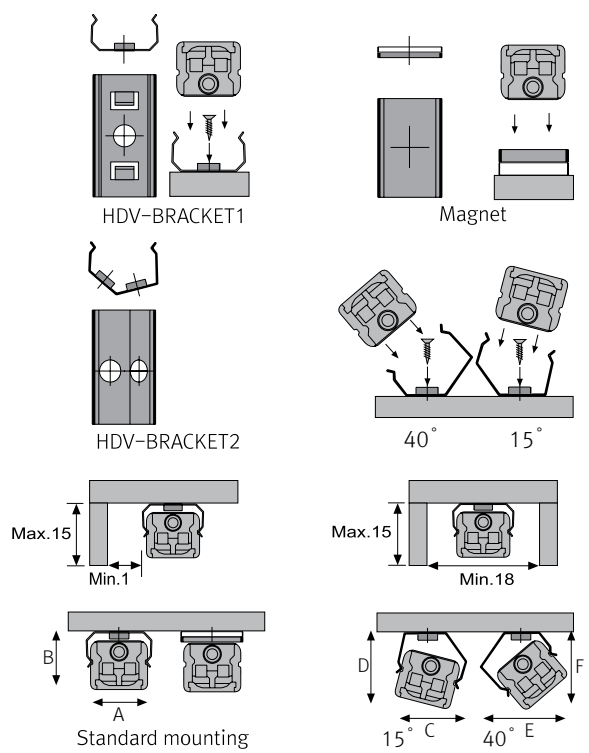

Max. connection

- DIVA2 RGB : 75Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
DIVA300RGB	2	5	12
DIVA600RGB	1	2	6
DIVA900RGB	-	1	4

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	16.8	14.2	17.5	16.5	19.1	17.5

Accessories

Ⓐ Connecting cables (Between DIVARGB & DIVARGB)


DVKRGB-150	DVKRGB-300	DVKRGB-600	DVKRGB-1200	DVKRGB-1800
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

Ⓑ Power feed : D AK-RGB-025

Power feed 2500mm (Between DIVARGB & 6-way distributor)

Ⓒ Mounting bracket : DV2RGB-CLIP

Included in fixture

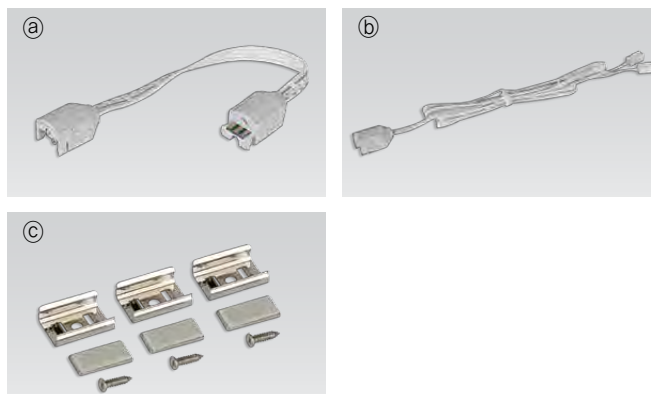

Anschluß-Belegung

