

KE-LED 3010 / 5018 | UV-A LED LEUCHTEN | UV-A LED LAMPS

UV-A
LED

230V
24V

IP54

H05
RN-F



UV-A LED

Metallhaken, drehbar
metal hook, rotatable

18x UV-A LEDs | 365 nm
18x UV-A LEDs | 365 nm

Plexiglas, 50 mm Ø
plexiglass, 50 mm Ø

10x UV-A LEDs | 365 nm
10x UV-A LEDs | 365 nm

Plexiglas, 30 mm Ø
plexiglass, 30 mm Ø

PVC Handgriff
PVC handle

Endkappen ABS
end caps ABS

KE-LED 5018 UV-A

KE-LED 3010 UV-A

KE-LED-EA 3010 UV-A

UV-A LED Rohr- & Handleuchten

Entdecken Sie unsere hochwertigen LED UVA Leuchten, die mit 230V und 24V betrieben werden können. Diese vielseitigen Produkte bieten maximale Flexibilität für Anwendungen wie Industrieinspektionen und forensische Untersuchungen. Die LED UVA Leuchten sind auch als Rohrleuchten erhältlich, ideal für UV-A-Prozesse wie die Trocknung und Härtung von Tinten, Lacken, Beschichtungen und UV-härtenden Klebstoffen.

UV-A LED tube & hand lamps

Discover our high-quality LED UVA lights, compatible with both 230V and 24V power sources. These versatile products offer maximum flexibility for applications such as industrial inspections and forensic investigations. The LED UVA lights are also available as tube lights, ideal for UV-A processes like drying and curing inks, coatings, paints, and UV-curable adhesives.

UV-A

MERKMALE | FEATURES



- Leuchtmittel: 10x bzw. 18x UV-A LEDs / 365 nm
- Schutzrohr: Plexiglas, 30 mm Ø bzw. 50 mm Ø
- Handgriff: PVC (Version Handleuchte)
- Endkappen: ABS (Version Rohrleuchte)
- Schutzart: IP54
- Schutzklasse: II / III
- Zuleitung: 5 m H05RN-F 2 x 1,0 mm² mit Stecker
- Spannungsvarianten: 230V (optional 24V)
- Längere Zuleitung, Kabeltyp, Stecker etc. auf Anfrage






- *Illuminant: 10x or 18x UV-A LEDs / 365 nm*
- *Protective tube: Plexiglas, 30 mm Ø or 50 mm Ø*
- *Handle: PVC (hand lamp version)*
- *End caps: ABS (tube luminaire version)*
- *Protection class: IP54*
- *Protection class: II / III*
- *Supply cable: 5 m H05RN-F 2 x 1.0 mm² with plug*
- *Voltage variants: 230V (optional 24V)*
- *Longer supply line, cable type, plug etc. on request*

TECHNISCHE DATEN | TECHNICAL DATA

	KE-LED-EA 3010 UV-A	KE-LED 3010 UV-A	KE-LED 5018 UV-A
Version Version	Rohrleuchte	Handleuchte	Handleuchte
Art.-Nr. Art.-No.	106012	106007	106009
Nennspannung <i>Nominal voltage</i>	220 - 240V AC	220 - 240V AC	220 - 240V AC
Schutzklasse <i>Protection class</i>	II	II	II
Anzahl LED <i>Number LED</i>	10	10	18
Wellenlänge <i>Wavelength</i>	365 nm	365 nm	365 nm
Handgriff <i>Handle</i>	---	PVC	PVC
Abschlusskappen <i>End caps</i>	ABS Endkappen / <i>ABS end caps</i>	---	---
Befestigung <i>Fastening</i>	2x Klammer / <i>2x clamp</i>	---	---
Ein-Aus Schalter <i>On-Off Switch</i>	ja / <i>yes</i>	nein / <i>no</i>	nein / <i>no</i>
Lebensdauer LED <i>Lifetime LED</i>	> 50.000 h		
Umgebungstemp. <i>Ambient temp.</i>	-20 °C - +40 °C		
IP Schutzart <i>IP protection class</i>	IP54		
Schutzrohr <i>Protective tube</i>	Plexiglas		
Zuleitung <i>Cable</i>	5 m H05RN-F 2 x 1,0 mm ²		
Stecker <i>Plug</i>	230V Version: ja <i>yes</i> (24V optional)		

ABMESSUNGEN | DIMENSIONS

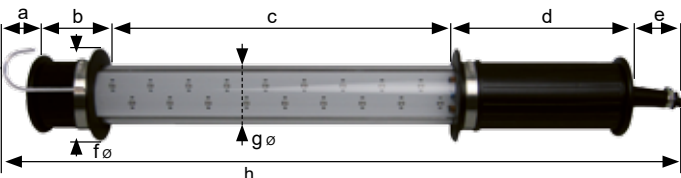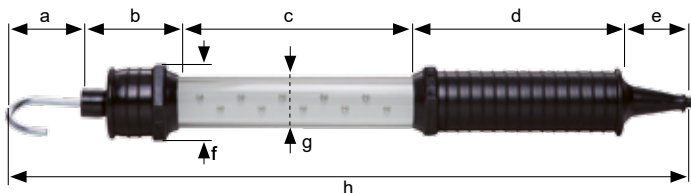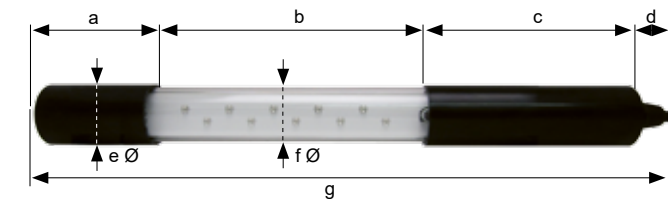

(in mm)	a	b	c	d	e	f	g
KE-LED-EA 3010	45	55	135	115	40	45	30

Gewicht | *weight*: ca. 0,5 kg

(in mm)	a	b	c	d	e	f	g	h
KE-LED 3010	45	55	135	115	40	45	30	390

Gewicht | *weight*: ca. 0,5 kg

(in mm)	a	b	c	d	e	f	g	h
KE-LED 5018	30	50	280	130	40	75	50	530

Gewicht | *weight*: ca. 0,8 kg